

PERMATEX SUPRA GREY GASKET MAKER

DESCRIPTION

Permatex Supra Grey Gasket Maker is a single component, room temperature vulcanizing gasketing compound designed to provide reliable "formed-in-place" gaskets for mechanical assemblies. This material cures on exposure to moisture in the air to form a tough, flexible, silicone rubber gasket. The product resists aging, weathering and thermal cycling without hardening, shrinking or cracking. Designed to perform under the higher load conditions of engines with closely spaced bolt patterns (typically non-US designed), and maintains outstanding oil, water-glycol resistance. OEM Specified.

DIRECTIONS FOR USE

For assembly as a form-in-place gasket

1. Remove all previous material from mating surfaces.
2. For best results, clean and dry all surfaces with a residue-free solvent.
3. Cut nozzle to desired bead size.
4. Remove cap, puncture tube or cartridge seal and attach extension nozzle.
5. Apply a continuous and even bead of silicone to one surface.


TECHNICAL CHARACTERISTICS

PRODUCT BENEFITS

- High load resistance
- Improved oil resistance
- Sensor safe, non-corrosive
- Replaces most cut gaskets
- Can be used as a gasket maker or dressing
- Non-flammable, Non-toxic
- Low odor

TYPICAL APPLICATIONS

- Valve covers
- Transmission pans
- Oil pans
- Timing gear covers
- Differential covers

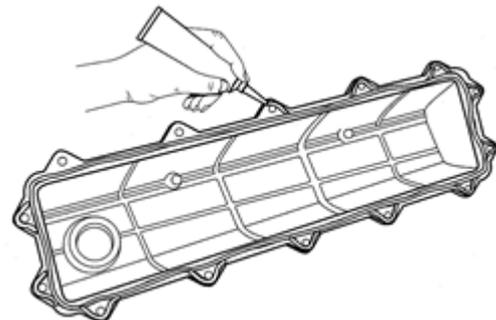

Before use:	METHODS	SPECIFICATIONS		
		MIN.	TYPICAL	MAX
Appearance			Grey thixotropic paste	
Temperature resistance			-70°C up to +270°C	
Continuous working temp.			-60°C up to +240°C	
Application temperatures ¹			+5 °C up to +45°C	
Extrusion speed (s)	20 gr, 2 mm nozzle, 2.75 bar	60	120	180
Slag (inch)	ASTM D 2202		0.1	0.2
Tack free time (min.)	UNE 27390/P20		40	
Curing rate, at 23°C, 50% RH	K30027		4	
(mm): 24 hr			6	
48 hr				
hr				
Density (g/cc)	ASTM D-1475		1.19	

¹ Due to condensations that might occur and affect adhesion, it is recommended against sealing on substrates at <5 ° C temperatures.



KRAFFT S.L.U.
P.O.Box 14
E-20140 Andoain - SPAIN
Fax:+34 943 410 430
Phone:+34 943 410 460
www.krafft.es

TECHNICAL DATA SHEET

35134, 35135
02/2015

PERMATEX SUPRA GREY GASKET MAKER

Totally Cured product 7 days at 23°C and 50% RH	METHODS	SPECIFICATIONS		
		MIN.	TYP.	MAX.
Hardness (Shore A)	ISO 868-2003	31	36	41
Tensile strength (MPa)	ISO 37-2005	0.9	1.4	1.9
E modulus at 100% elongation (MPa)	ISO 37-2005	0.55	0.7	0.85
Elongation at break (%)	ISO 37-2005	170	230	290

HEAT RESISTANCE: characteristics after 1 week at 300°C	METHODS	SPECIFICATIONS		
		MIN.	TYP.	MAX.
Hardness (Shore A) (%)	ISO 868-2003		41	
Tensile strength (%)	ASTM D 412/C		0.9	
Elongation at break (%)	ASTM D 412/C		75	

The information herein is offered in good faith based on KRAFFT's research and it is believed to be accurate. KRAFFT keeps the right to modify the specification without previous notice.